


FAAC A1400 Slide Door Checklist




Customer _____
 Quote Name/Site: _____
 Quote Number: _____
 Date: _____
 Quantity: _____

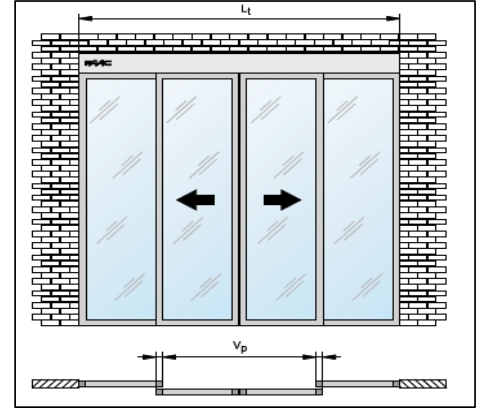

Passage Opening, mm (Vp): _____
Overall length (single) = 2 x Vp + 60mm (including end caps)
Overall length (dual) = 2 x Vp + 110mm (including end caps)
 (Non Standard Head Section length, mm: _____)

Door Configuration

- Single - left
- Single - right
- Dual
- Telescopic - left
- Telescopic - right
- Telescopic - Biparting
- Double motor

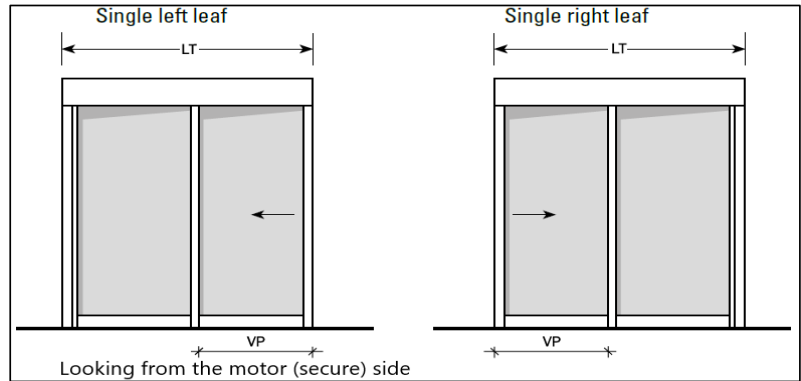

Pelmet

- 100mm Pelmet height
- Powdercoated
- 140mm Pelmet height
- Colour: _____

Leaf Type

- Aluminium Frame Thickness (mm): _____
- Glass Thickness (mm) _____
- Weight (kg, per leaf): _____
- Max: 200kg (single), 2 x 120kg (dual)*

Opening/Safety Sensor (Qty)

- Sensor, IXIO DT1 Radar + Infrared Safety
- Sensor, Eagle 5 Black Motion Sensor
- Other: _____

Accessories

- Floor Guide Kit framed door (FAAC door profile only)
- Lower Guide Profile 3m (FAAC door profile only)
- Lower Guide Profile Brush 3m (FAAC door profile only)
- Frameless door guide, 10mm
- Frameless door guide, 12mm

Battery/Function Selectors/Switches/Locks

- Battery backup
- SDK EVO Full Programmer
- LK EVO Keeper Light, Function Selector
- KS EVO Key function selector
- XM Motor Lock, Fail Safe
- XB Motor Lock, Fail Secure with release switch
- Magic Switch, contactless
- Magic Switch in enclosure, contactless
- Magic Switch in IP65 enclosure, contactless
- Green Mushroom Mullion Plate

Comments
