

InterLock

Security doors



AS AUTOMATIC
SYSTEMS

Access controlled...
Future secured



AESTHETICS

- Light modern structure featuring a large glazed surface
- Doors mounted directly onto existing floor
- Indoor, façade or outdoor installation (under canopy)
- Elegant, thin canopy for integration into virtually any building, while ensuring passage height in excess of 2000mm
- Wide range of finishes (brushed or mirror stainless steel, various RAL colour paints, obstacles in tinted glass)

FLEXIBILITY

- Available options: products disassembled in accordance with on-site installation requirements
- Combination of various passage widths (InterLock 674)
- Electronic and mechanical parts located in the canopy, easily accessible for maintenance
- Wide range of accessories available

SECURITY

- Rectangular booths with entry/exit sliding doors (InterLock 673/674)
- Bullet, vandalism and burglary resistant, fully compliant with industry standards (EN 1063, EN356)
- Several electronic detection systems available
- Outside surveillance
- User safety ensured

PERFORMANCE

- Automated high-flow pedestrian access control
- Control panel for set up and control
- Energy savings
- Remote management using TCP/IP connectivity



THE INTERLOCK 67X SERIES

SQUARE SECURITY BOOTHS

Single or double rectangular booths equipped with fast sliding doors (InterLock 673/674), ensuring a high level of access control. They are particularly suited to public sites.



InterLock 673

Simple passage
 Passage width : 900mm
 Footprint (L x W) : 1600 x 1200mm

InterLock 674

Double passage
 Passage width : 700 / 900mm
 Footprint (L x W) : 2300 x 1200mm


InterLock 680

Simple passage
 Passage width : 950mm
 Footprint (L x W) : 1050 x 400mm

SPECIFICATION

	FOOTPRINT (L X W X H) (MM)	OBSTACLE HEIGHT (MM)	PASSAGE WIDTH (MM)	PASSAGES / MINUTE	DISABLED ACCESS	OBSTACLES	MOVEMENT	APPLICATION		AESTHETICS		MCBF (**)
								INDOOR	OUTDOOR	CONTEMPORARY	CLASSIC	
IL 673	1600 x 1200 x 2350	2135	900	6	●	2	Retractable (1,5s)	●	● ^(*)	●		1 million/2 years
IL 674	2300 x 1200 x 2350	2135	700+900	2 x 6	●	2*2	Retractable (1,5s)	●		●		1 million/2 years
IL 680	1050 x 400 x 2250	2100	950	6		2	Swing	●	● ^(*)		●	1 million/2 years

^(*) Under canopy / ^(**) MCBF = Mean cycles between failure

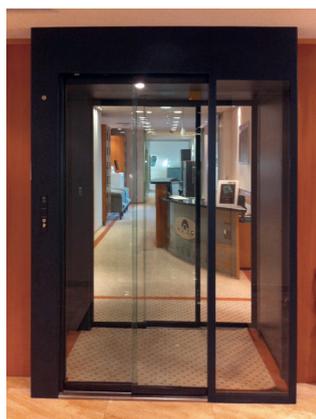

OPTIONS & ACCESSORIES



- Entry and/or exit opening sensor
- Entry metal detector device
- Left object detection (with entry metal detector device)
- Housing available in a number of RAL paint finishes
- Housing 304L stainless steel (brushed or mirror polish)
- Internal column for readers and accessories

- Adaptation for UL power supply 230/110 V AC
- Tinted glass finish
- Special frame for built-in installation
- Converter RS485-LAN for networking capability
- Dismountable booth



BENEFITS

- Automated pedestrian access control
- Secures access to restricted areas
- Employee and visitor entry/exit management
- Access control management at public sites
- Reduces the need for security personnel
- Energy savings

APPLICATIONS

- Office buildings
- Headquarters
- Administrative sites
- Government buildings
- Airports
- Sensitive sites : industrial sites, data centres, banks